

EXPLOSION PROOF LIGHT A SERIES




A2



A



A3

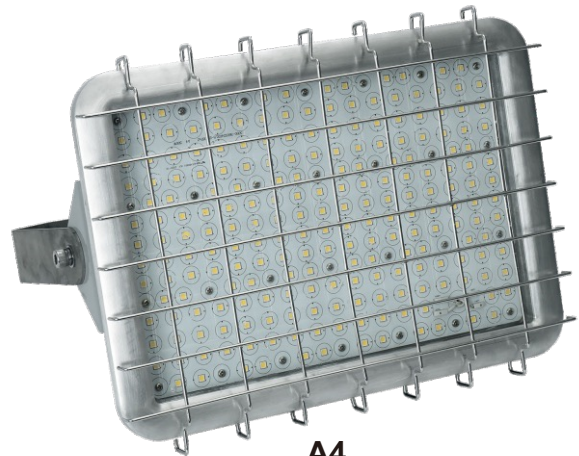

A4



Explosion Protection

Marking Atex

II 3 G Ex ec IIC T3C Gc
 II 2 D Ex op is tb IIIC T160°C Db
 EX IIC EX mb eb IIC T3C GB
 II2 EX op is tb IIC T3C DB

Marking IECEX

Ex ec IIB T3C Gc
 Ex op is tb IIIC T160°C Db
 EX mb eb IIC T3C Gb
 EX op is tb IIC T3C Db

Marking UI844 (North American)

Class I, Division 2, Groups A, B, C, D
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

Marine Marking

UL 1598A
 ABS

Other Rating IP 66

Materials

- Housing: Aluminum
- Lens: Tempered glass

- Hardware: stainless steel
- Mounting Bracket: stainless steel




Features

- Working Temperature: -40°C ~ +55°C.
- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver with emergency back up.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- Up to 5 years limited warranty option.
- Emergency Battery back up to three hours.
- Various installation ways for different applications.
- Glass lens or Glass with polycarbonate lens to make bigger beam angle.




Light Distribution


200W/40D




200W/60D



200W/90D



200W/120D



Specification

Model	Wattage	Color Temperature	Voltage	Lumens	Warranty	CRI
EX-20W A2YZDA	20W	2200K-7000K	AC100-277V(by driver or by IC) Or DC12-48V	2800	5 years	80
EX-40W A2YZDA	40W			5600		
EX-60W A2YZDA	60W			8400		
EX-80W AYZDA	80W		AC100-277V(by driver or by IC) Or DC12-48V	11200		
EX-100W AYZDA	100W			14000		
EX-150W A3YZDA	150W		AC100-277V(by driver or by IC) Or DC12-48V	21000		
EX-180W A3YZDA	180W			25200		
EX-200W A3YZDA	200W		AC100-277V(by driver or by IC) Or DC12-48V Or AC200-480V	28000		
EX-150W A4YZDA	150W			21000		
EX-180W A4YZDA	180W			25200		
EX-200W A4YZDA	200W			28000		
EX-250W A4YZDA	250W			35000		
EX-300W A4YZDA	300W			42000		

“A,A2,A3,A4”=Product code. “Y”=D or N:Dimmable or non-dimmable “Z”=CCT, from 2200-7000K.
“D”=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°.


Packing Information

Model	Quantity/Carton	Length(cm)	Width(cm)	Height(cm)	Net weight(kg)	Gross weight(kg)
A	1	37.5	34	21.5	6.95	7.9
A2	1	36.5	27	30.5	4.15	5.3
A3	1	48.5	34	36.5	8.3	10.3
A4	1	35	47	40	15.1	17


Dimension

These structure type with bracket, flat glass and optics lens generates 40°, 60°, 90° and 120° light distribution.
Unit: mm or inch


A2 Series

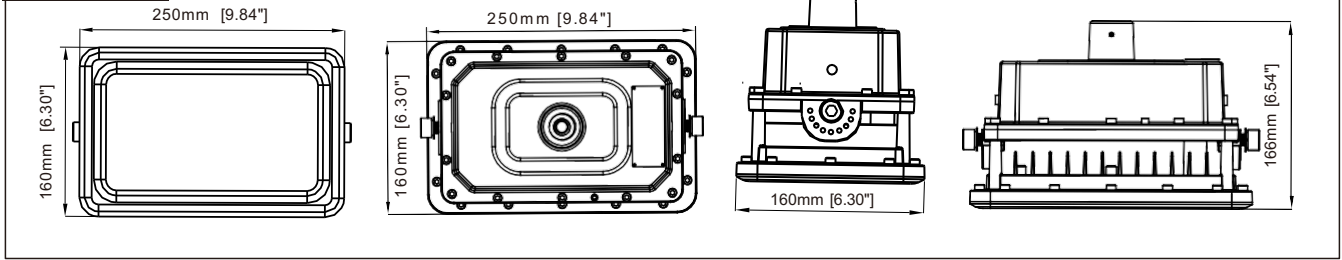


A Series

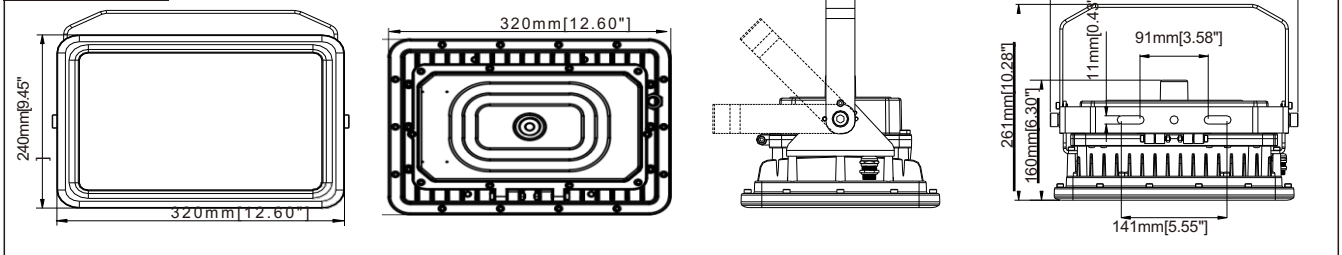


A3 Series

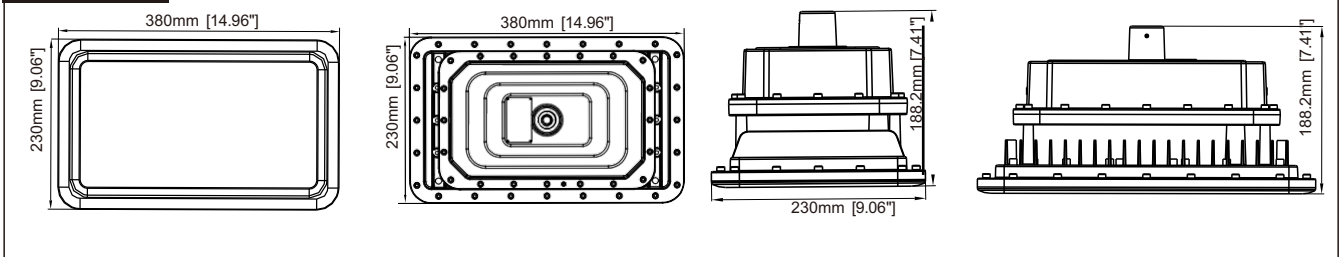


A4 Series

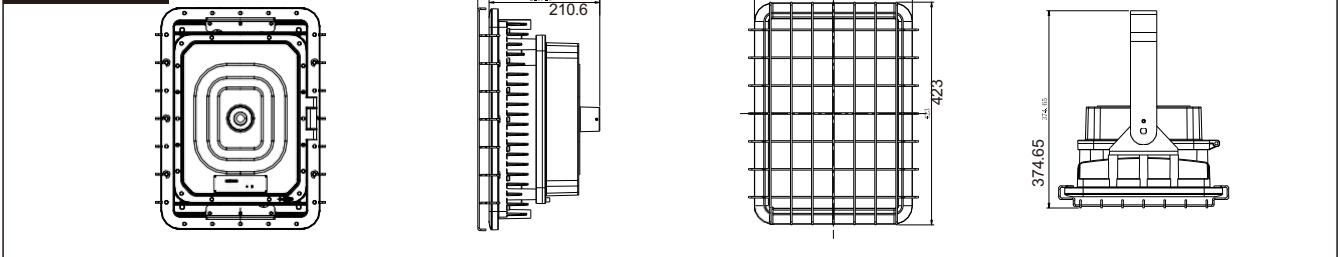

Ceiling Mounting

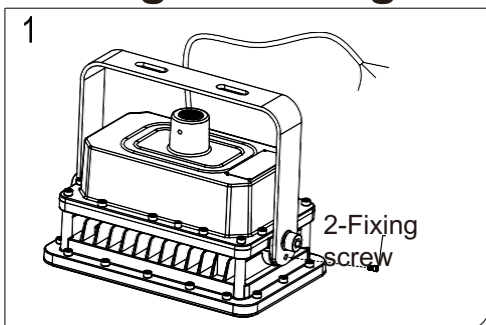


2. Install and tighten flexible metal conduit with the fixture.

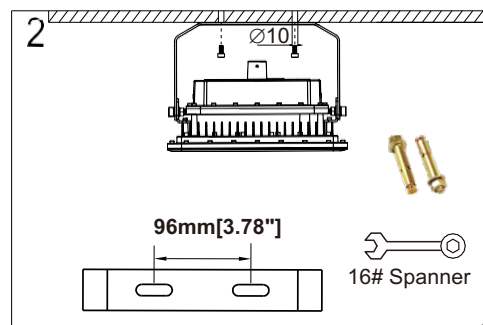


3. Drill 2x hole as shown in Fig.2, the distance can be 91~140mm, fixing Ø10 expanded crews and bracket on ceiling.

EXPLOSION PROOF LIGHT A SERIES

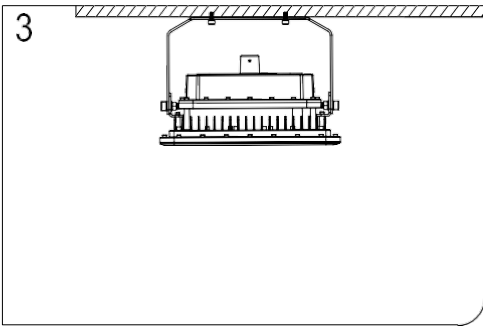


4. Connect black cable to L, connect white cable to N, connect green cable to grounding.

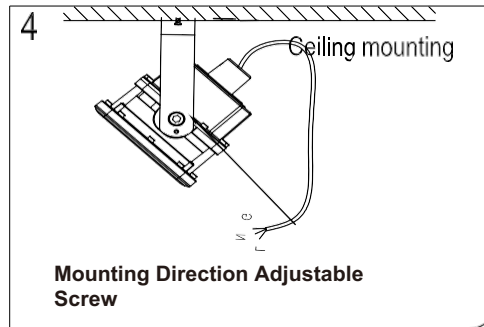


5. Adjust the beam angle from 0-180°.


Wall Mounting

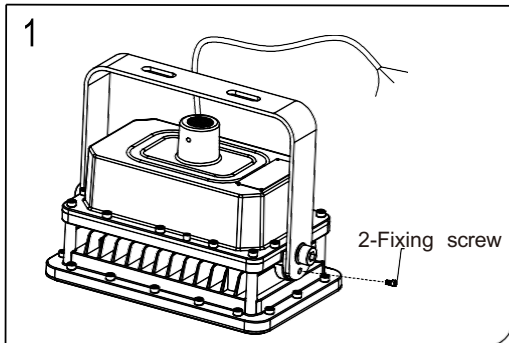


1. Take the fixture and accessory out from carton box, tighten 2x angle holder screw as Fig.1.

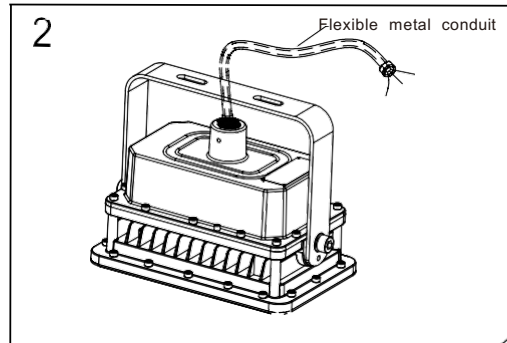

2. Install and tighten flexible metal conduit with the fixture.

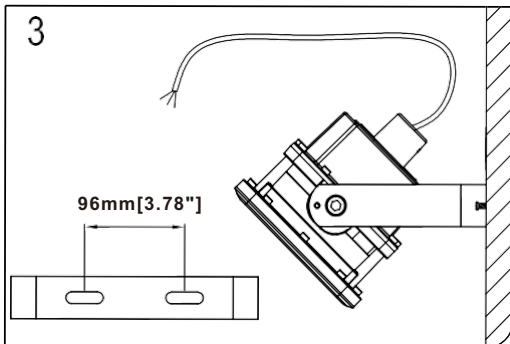


3. Drill 2x hole as Shown in Fig.2, the distance can be 91~140mm, fixing $\varnothing 10$ expansion screws and bracket on ceiling.

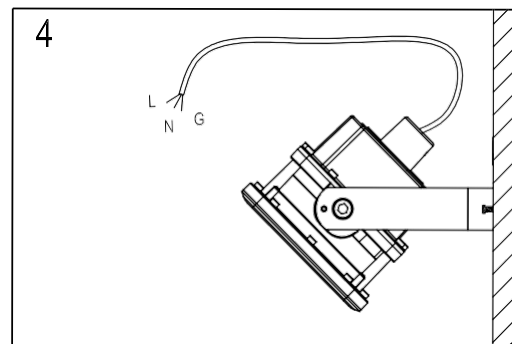


4. Connect black cable to L, Connect White cable to N, Connect green cable to grounding.

Pole Mounting

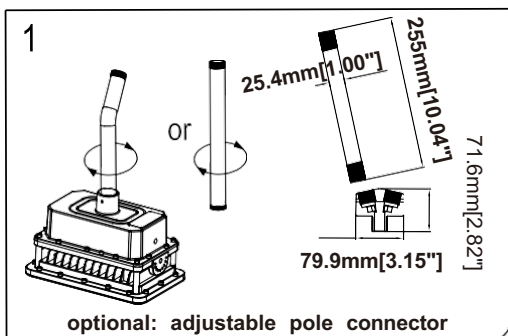


1. Take the fixture and pole accessory out from carton box, tighten pole as shown in Fig.1.

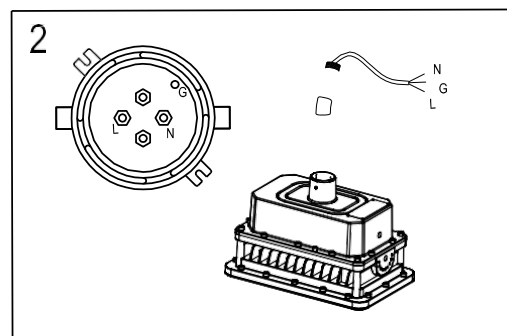


2. Connect black cable to L, Connect White cable to N, Connect green cable to grounding.

EXPLOSION PROOF LIGHT A SERIES

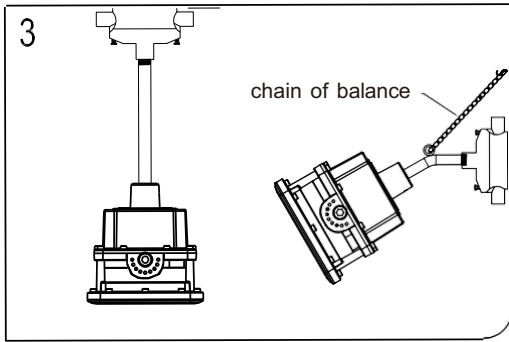


3. Drill 4x Ø10mm holes, as 100mm distance, install the junction box to the wall or ceiling as shown in Fig.3, tighten the pole to the box, and adjust the chain of balance.

Hook Pendant

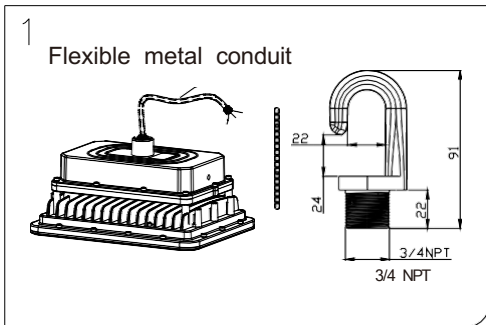


1. Take the fixture and accessory out from carton box, tighten 2x angle holder screw as shown in Fig.1.

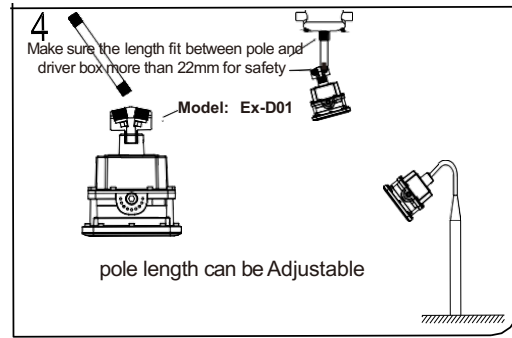


4. Adjustable pole installation. With this adjustable kit, you can Make any light distribution direct as you want.


Optional: Install the fixture to the long pole after cable connecting cable.

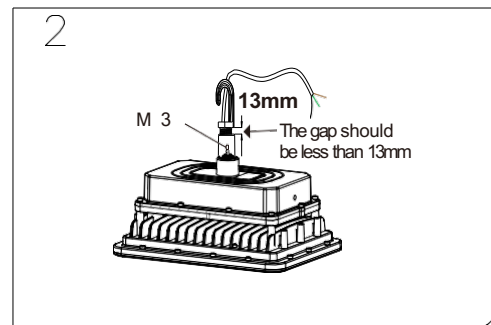

2. Tighten the hook with the fixture, at least 6x teeth need to be tighten, fix the M3 screw to prevent the hook loosening .

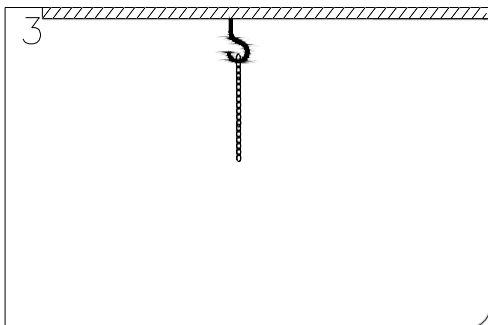


3. Drill 1 expansion screw hole and install it, and hang the chain as shown in Fig.3.

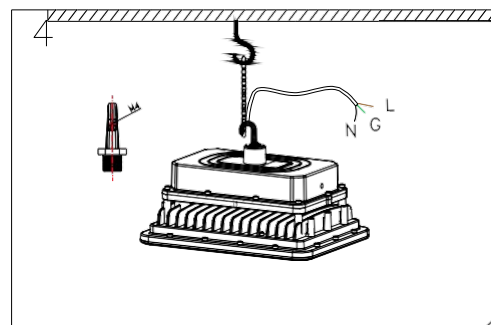


4. Hang the fixture to the hook as above, connect black cable to L, connect White cable to N, connect green cable to grounding.

Arm Mounting


This installation method is only for Model A2 and Model A. It can not be applied on model A3 because model A3 too heavy. Only one electrician is required for this installation.

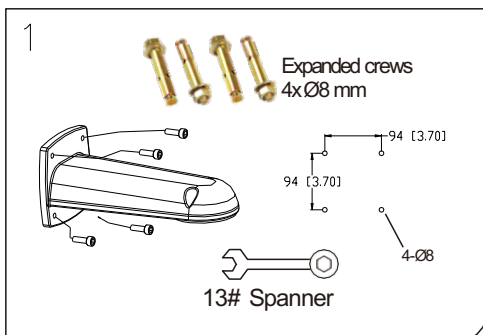


1. Drill 4x holes as above distance, and fix the arm on the wall, tighten 4x screws as shown in Fig.1.

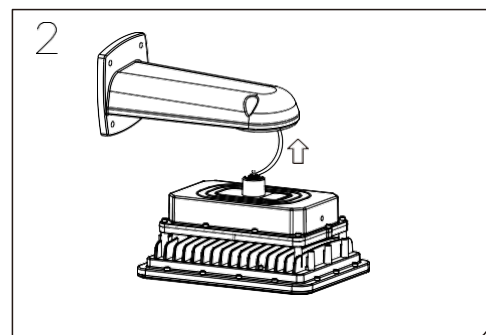

2. Contact the power AC wire with lamp, put the terminal into the arm.

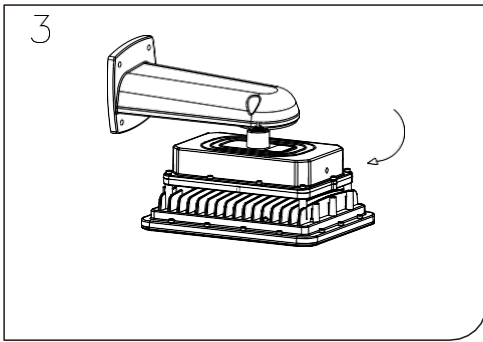


3. Match the circle part with arm, and rotate it to right.

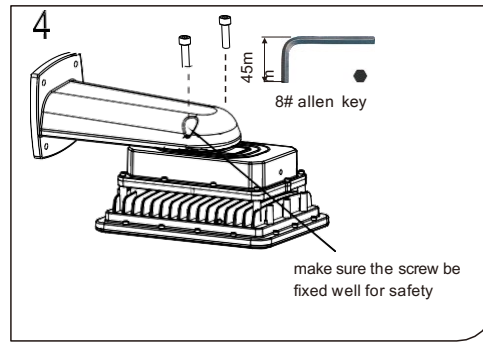


4. Tighten 2x screws to avoid the lamp loosed.

Stanchion Mounting


This installation method is only for Model A2 and Model A. It can not be applied on model A3 because model A3 too heavy. Only one electrician is required for this installation.

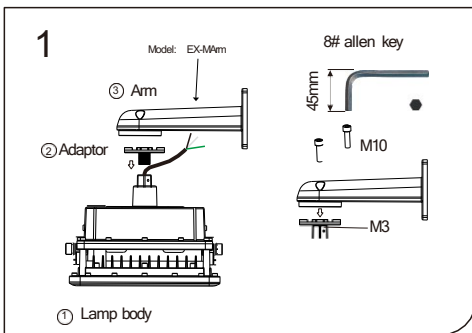


1. Tighten part 2 and assembly 1, and fix the M3 screw, install, arm to the adaptor, tighten the M10 via 8# allen key.

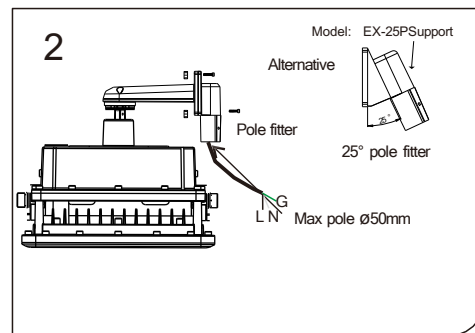

2. Install the pole fitter with arm via 4x M8 screws, the max suitable pole diameter 50mm, the alternative 25 degree pole fitter.

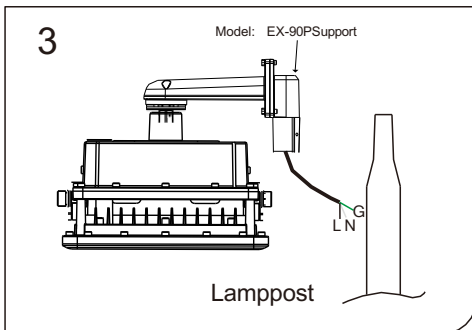


3. Contact the cable to AC wire, connect black cable to L, connect White cable to N, Connect green cable to grounding.

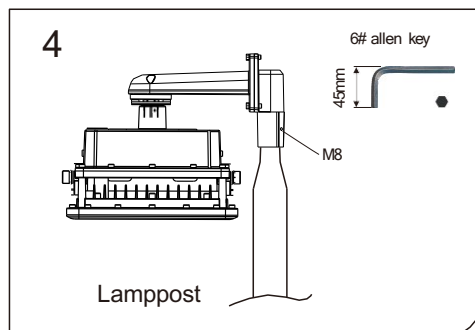


4. Slip the fitter to the lamppost and tighten M8 inner hexagonal screw.

Wall Mounting to junction box

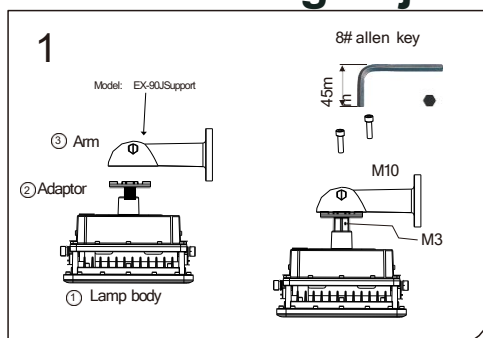


1. Tighten part 2 and assembly 1, and fix the M3 screw, install arm to the adaptor, tighten the M10 via 8# allen key.

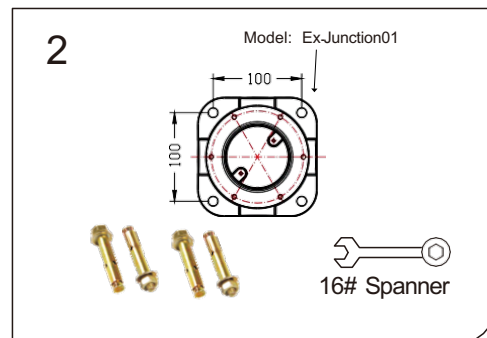


2. Drill 4x Ø10mm holes Install the junction box to the wall via M10 expanded screw.

EXPLOSION PROOF LIGHT A SERIES

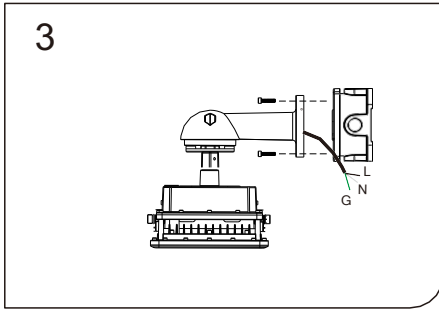

3. Contact the AC wire to power system, connect black cable to L, connect white cable to N, connect green cable to grounding.

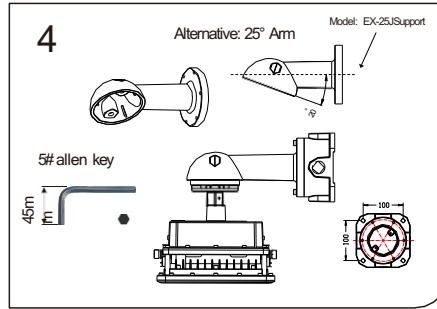

4. Tighten 6 x screws between arm and junction box, turn

Accessories



- Model: Ex-Junction01
Name: Junction Box



- Model: EX-Hook
Name: Installation Hook
Material: Aircraft Aluminum A383



- Model: Ex-Conduit01
Name: Metal Conduit
Material: Stainless Steel and Aluminum



- Aluminum A383
Model: EX-WPipe
Name: Winding Swing Pipe
Material: Iron with Power Coating



- Model: EX-SPipe
Name: Winding Swing Pipe
Material: Iron with Power Coating



- Model: Ex-D01
Name: Pendant Direction Adapter
Material: Aircraft Aluminum A383



- Model: EX-MArm
Name: Surface Mounting Arm
Material: Aircraft Aluminum A383



- Model: EX-25PSupport
Name: 25 Degree Pole Support
Material: Aircraft Aluminum A383



- Model: EX-90PSupport
Name: 90 Degree Pole Support
Material: Aircraft Aluminum A383



- Model: Ex-90JSupport
Name: 90° Arm to Junction box
Material: Aircraft Aluminum A383



- Model: Ex-25JSupport
Name: 25° Arm to Junction box
Material: Aircraft Aluminum A383



- Model: Ex-DArm
Name: Direct Mounting Arm
Material: Aircraft Aluminum A383

