



LED T5 TUBE TYPE B G3 SERIES

G4 SERIES

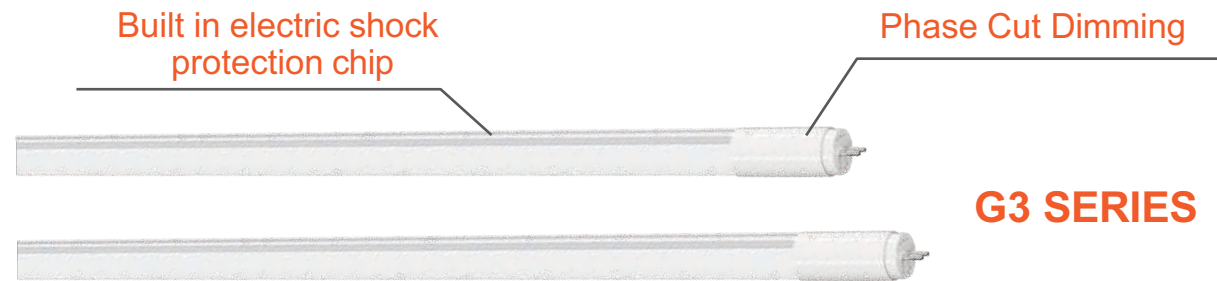

G3 SERIES

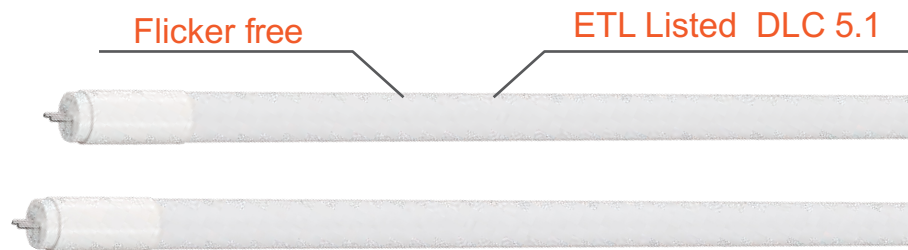

Product Features

- **Dimming:** Phase Cut(Triac) Dimming. 0-10V Option.
- **Safe:** Built in electric shock protection chip,Current shall not exceed 5 M.I.U
- **Installation:** Ballast bypass, Direct wire, Single-End or Double-End Input.
- **Construction**
Housing: Aluminum Housing, durable, excellent heat dissipation performance, Nano plastic optional.
Lens: Polycarbonate Frosted / Clear lens, UL-94 V0 Feature.
- **LED System:** LED system with a life rating of $\geq 50,000$ hours at L70 @25°C. Luminous efficacy > 130 lm/W.
- **Electrical:** 120V-277/347VAC, Flicker Free Option, PF ≥ 0.9 and THD $\leq 20\%$.
- **Certification:** ETL Listed. DLC SSL5.1 Standard.
- **Warranty:** 5-Year Limited Warranty.

Technical Datasheet

Item	2FT Series	3FT Series	4FT Series
Rated Power	10W/12W	12W/18W	10W/12W/15W/18W/24W
Luminous	Max.1040 lm	Max.2340 lm	Max.3120 lm
Input Voltage	120-277V / 120-347V / 60Hz		
Efficacy	> 130 lm/W		
CCT	30K/35K/40K/50K/65K Options		
CRI	RA > 80 R9 > 0		
Dimming	Phase Cut		
Beam Angle	140° / 220°		
Operate Temp	-4 F ~ 104 F		
Environment	Damp Location		
Life / Warranty	50000H / 5 Years		
Certificate	ETL / FCC / DLC / RoHs		

Item	G4	G3
2FT	24" x 0.7" x 0.7"	24" x 0.7" x 0.7"
3FT	36" x 0.7" x 0.7"	36" x 0.7" x 0.7"
4FT	48" x 0.7" x 0.7"	48" x 0.7" x 0.7"

