


# LED T8 EMERGENCY TUBE G3 SERIES

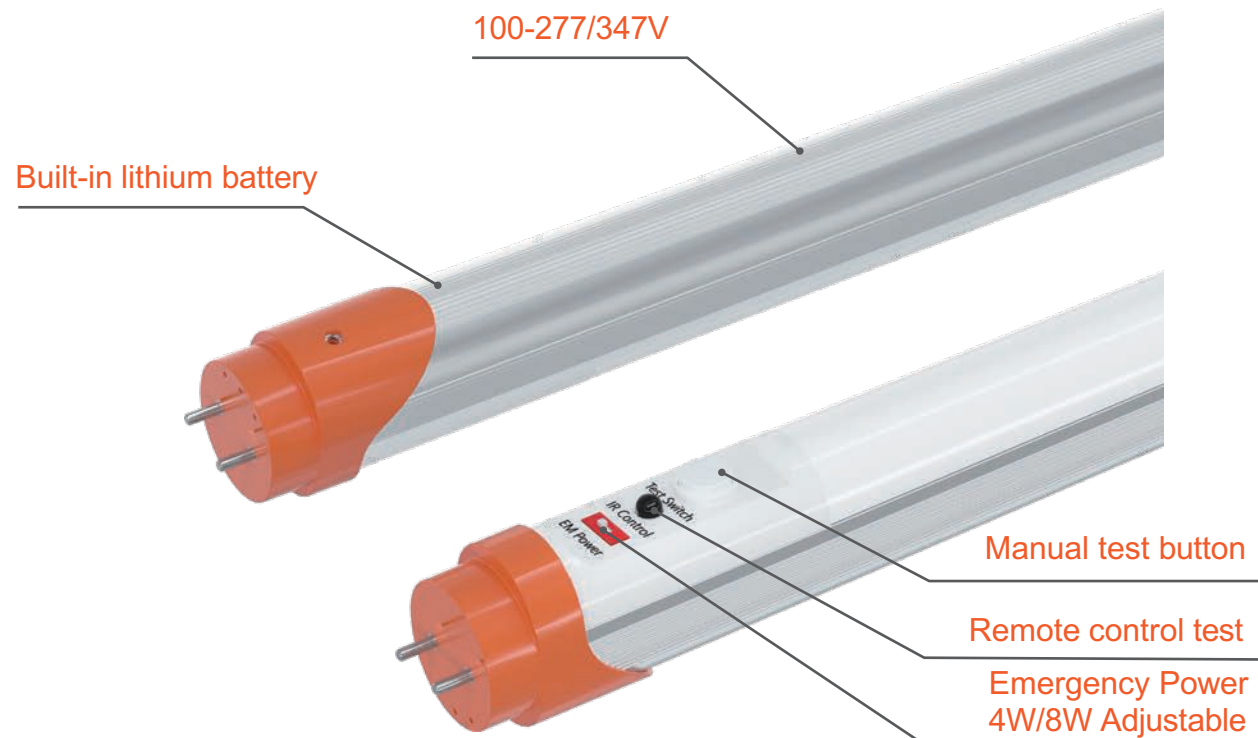

## Product Features

- **Emergency Power:** Emergency Power 4W/8W Adjustable.
- **Emergency Time:** 4W 180 minutes, 8W 90 minutes.
- **Test:** Emergency function test of button or remote controller.
- **ALL IN ONE:** Power & CCT Adjustable Option
- **Construction:** Aluminum case and PC lens, Standard colors are Clear and Frosted.
- **LED System:** LED system with a life rating of  $\geq 50,000$  hours at L70 @25°C. Luminous efficacy  $> 130$  lm/W.
- **Electrical:** 100V-277/347 VAC. PF $\geq 0.9$  and THD $\leq 20\%$ .
- **Certification:** ETL Listed, DLC SSL 5.1, FCC, RoHS.
- **Five-year Limited Warranty.**

## Technical Datasheet

Part No.	Length	Power	Luminous Flux	Luminous Efficacy	Emergency Power & Luminous Flux & Time	Certificate
EDI-T84F10-B G3	4FT	10W	1700 lm	170 lm/w	4W Emergency 520lm 180 minutes 8W Emergency 1040lm 90 minutes	ETL / DLC FCC / RoHS
EDI-T84F12-B G3		12W	1800 lm	150 lm/w		
EDI-T84F15-B G3		15W	1950 lm	130 lm/W Emergency		
EDI-T84F18-B G3		18W	2340 lm			
EDI-T84F20-B G3		20W	2600 lm			
EDI-T84F22-B G3		22W	2860 lm			
EDI-T84F24-B G3		24W	3120 lm			

Item	L x W x H(inch)
4FT	47.71" x 1.14" x 1.49"

