

# LED PL VERTICAL RETROFIT LAMP-TYPE A

## PRODUCT FEATURES

- 6" Can suitable and 26watt CFL equivalent
- 80+ CRI
- L70 life 50 ,000hours
- Rotatable 180°(Horizontal model) Die casting Aluminum heat sink
- Operating Temperature -4°F to 105°F UL damp listed
- Not use for totally enclosed fixtures
- The units are intended to retrofit Type IC or non-IC recessed mount listed luminaires 5 years limited warranty
- Universal G24q 4-pin base can retrofits G24q-1,G24q-2,G24q-3,GX24q-1,GX24q-2 and GX24q-3.
- Safety Feature: Built- in Thermal Detector support lamp cut off the power from over driven of incompatible electrical ballast.
- High power factor>0.9

## INSTRUCTION

- Type A plug in LED PL retrofit lamps only work with electronic ballast and no need to bypass.
- 12-Watt LED PL Vertical retrofit lamp G24q base will be replacement for CFL bulbs in a variety existing lamp installations of commercial applications.



# LED PL VERTICAL RETROFIT LAMP-TYPE A

## ORDERING NUMBER LOGIC

Typical order example: 12 PL03HG24Q LED27


Model Number	Power (lamp only)	Lumen Output	Base	Version	CCT	Voltage	Suitable Location	Beam Angle	Control
12 PL03VG24QLED27	12W Max	900 Lm	G24Q	Vertical	2700K	Driven by CFL Ballast	Dry and Damp	140°	Non-Dimming
13 PL03VG24QLED30		1000 Lm			3000K				
14 PL03VG24QLED35		1100 Lm			3500K				
15 PL03VG24QLED40		1100 Lm			4000K				
16 PL03VG24QLED50		1100 Lm			5000K				

### Application Notes:

This instant fit is suitable for operation with ballasts from the following manufacturers: Triad/Universal Lighting Technologies/ Hatch Lighting/OSRAM Sylvania/Philips Advance/ Energy Savings  
Please find specific ballast models as attached table.

### BASE OPTION

Unit: inch

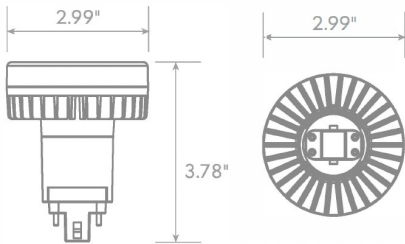


### ACCESSORIES- EXTENSION ADAPTER

Use for narrow long neck Lithonia can



### LIGHTING DISTRIBUTION

Single vertical lamp



Fixture: Lithonia 6VF 1BDDT/TRT MVOLT