

LED TUBE TYPE C U-BEND SERIES



G5 SERIES

G6 SERIES



Product Features

Electrical

- Driver: 120-277V, 120-347V, 60Hz. PF>0.9, THD<20%, 12V DC Option.

LED CHARACTERISTICS

- SMD2835 LEDs Lifespan>60000H, 30K/35K/40K/50K/65K options

Construction

- Housing: Aluminum Housing, durable, excellent heat dissipation performance, Nano plastic optional.

Lens: Polycarbonate Frosted / Clear lens, UL-94 V0 Feature.

Emergency Battery Options

- Optional 120-277V/347V integral emergency battery pack available in 8W or 15W

Integrated Controls

- Sensor: Microwave Sensor/PIR Sensor, Daylight/Daylight Harvest Options

Compliance



- ETL Listed, DLC Premium, FCC, RoHS

Warranty

- Five-year Limited Warranty.

Dimension

Item	G5	G6
2FT	22.0" x 2.7" x 1.1"	22.2" x 6.2" x 1.1"

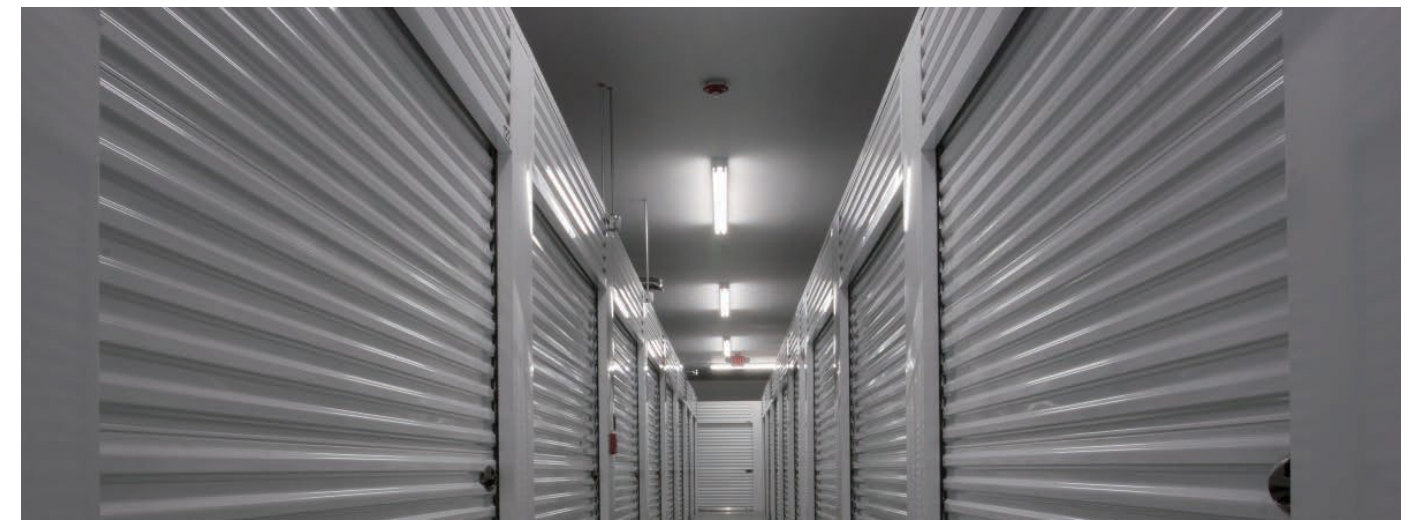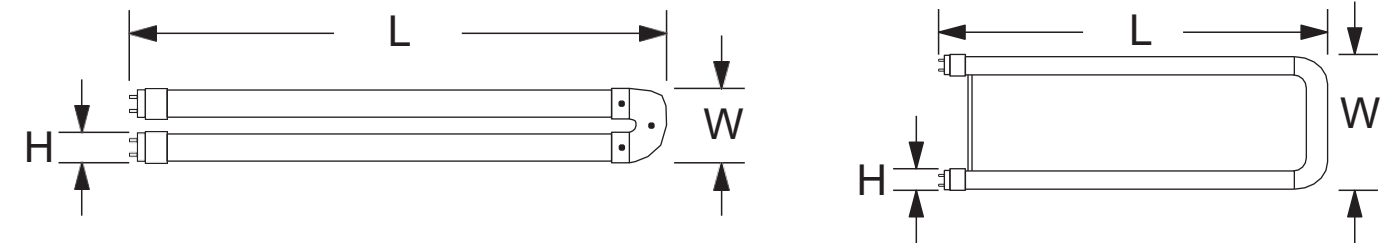

Technical Datasheet

Item	1-5/8" Series	6" Series
Rated Power	10W/12W/15W/18W/20W/24W/30W/36W/48W	10W/12W/15W/18W/20W/24W/30W/36W/48W
Luminous	Max.6240 lm	Max.6240 lm
Input Voltage	120-277V / 120-347V / 60Hz	
Efficacy	>130lm/W	
CCT	30K/35K/40K/50K/65K Options	
CRI	RA>80 R9>0	
Dimming	0-10V	
Beam Angle	140°	
Operate Temp	-4°F ~ 104°F	
Environment	Damp Location	
Life / Warranty	50000H / 5 Years	
Certificate	ETL / FCC / DLC / RoHS	