

LED FLOOD LIGHT FL-07-G8 (A)

BETTER SOLUTIONS FOR LED FLOOD LIGHT



IP66 water-proof
Easy Installation



AC100-277V 50/60Hz
120Lm/W 150Lm/W


Operating Temp: -40°C~+50°C Storage Temp: -40°C~+80°C

OPTIONS

POWER	CCT	Beam Angle
Inventronics driver	3000K	10°
	4000K	15°
	5000K	30°
	5700K	60°
		90°
		T2 (117*34°)

APPLICATIONS

- Sports lighting
- Stadium lighting
- Sports Fields
- Car Parks
- High mast installation
- Docks
- Railways and container yards
- Ports and other large scale outdoor applications
- Landscape lighting
- Exhibitions

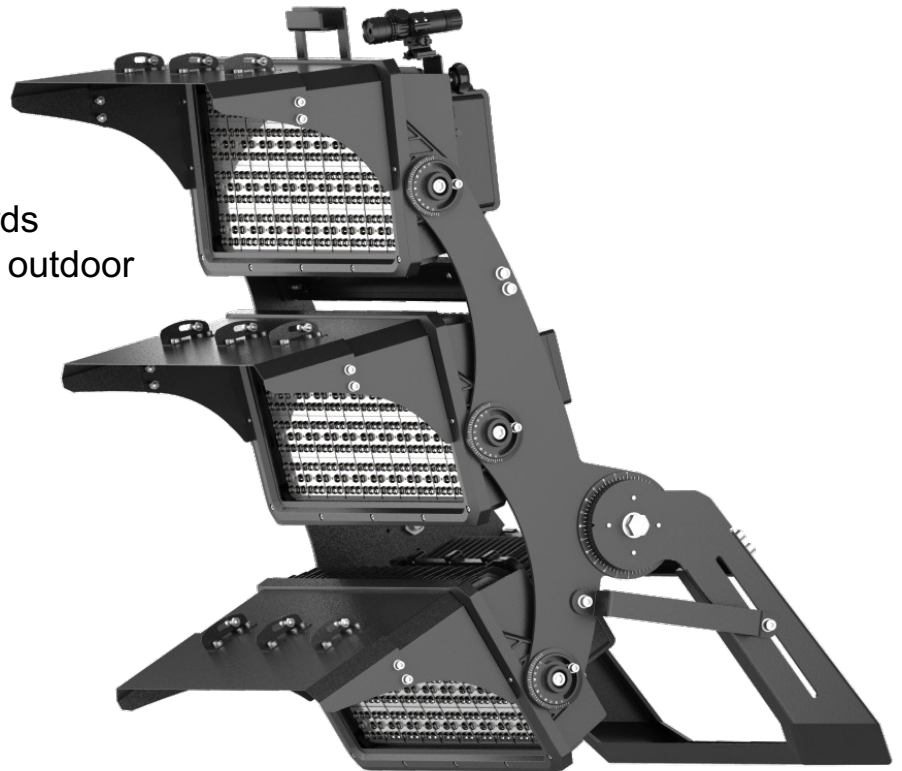

CERTIFICATIONS




LED FLOOD LIGHT FL-07-G8 (A)


SPECIFICATIONS

Item	Power	Luminous Efficacy	Leds	CRI	Weight	Beam Angle
FL400W-07-G8	400W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	18.5kg(40.8lbs)	10°/15° 30°/60°/90°/T2
FL500W-07-G8	500W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	18.5kg(40.8lbs)	10°/15° 30°/60°/90°/T2
FL600W-07-G8	600W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	19.5kg(43.0lbs)	10°/15° 30°/60°/90°/T2
FL800W-07-G8	800W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	41.1kg(90.4lbs)	10°/15° 30°/60°/90°/T2
FL1000W-07-G8	1000W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	41.1kg(90.4lbs)	10°/15° 30°/60°/90°/T2
FL1200W-07-G8	1200W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	43.4kg(95.7lbs)	10°/15° 30°/60°/90°/T2
FL1500W-07-G8	1500W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	56.5kg(125lbs)	10°/15° 30°/60°/90°/T2
FL1800W-07-G8	1800W	120Lm/W 150Lm/W	SAMSUNG 3535 SMD 5050	>70	60.0kg(132lbs)	10°/15° 30°/60°/90°/T2


DIMENSIONS(MM)

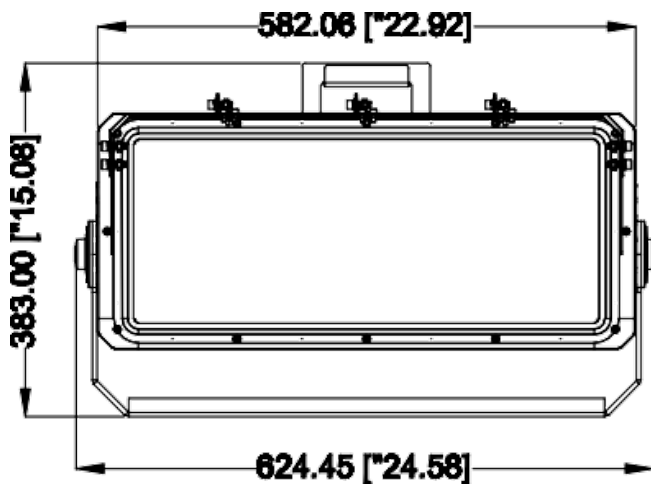

400W/500W/600W

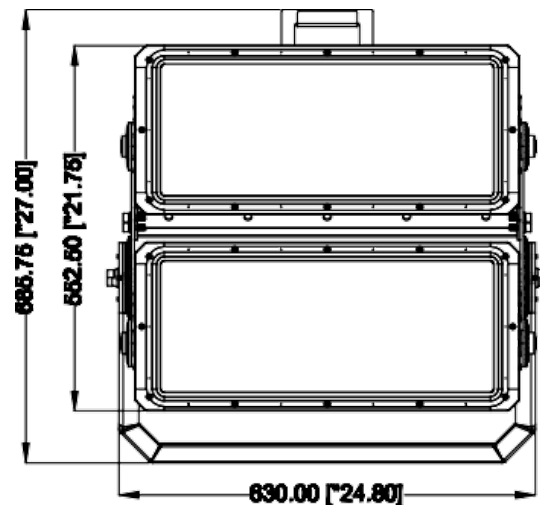


800W/1000W/1200W

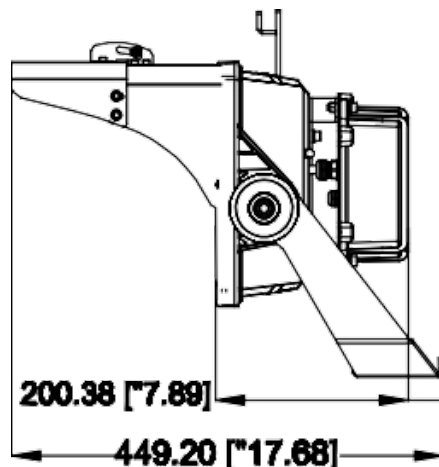

LED FLOOD LIGHT FL-07-G8 (A)

DIMENSIONS(MM)

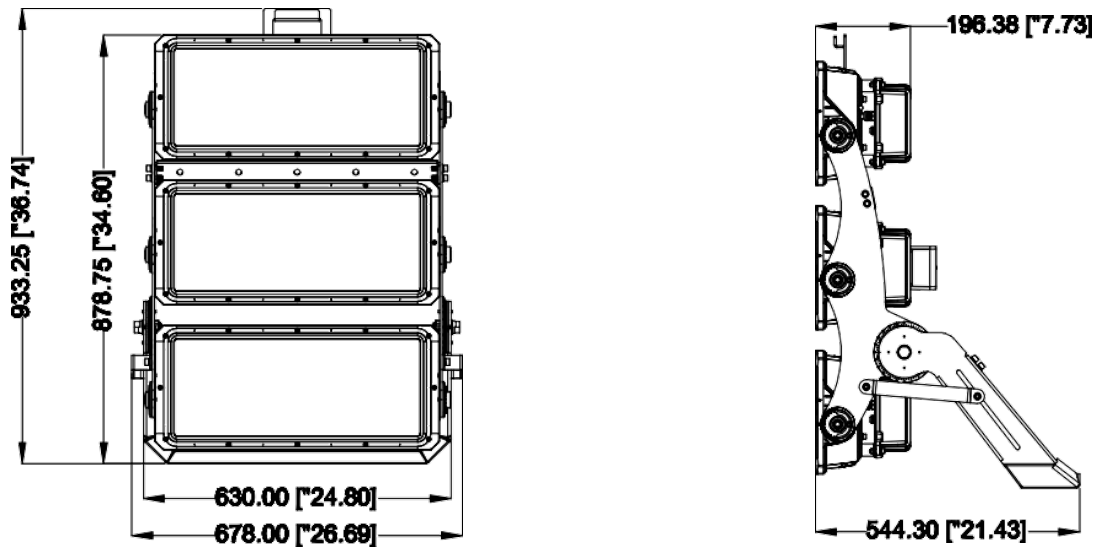

1500W/1800W

MODEL OPTIONS



P1

400W/500W/600W



P2



P1


800W/1000W/1200W



P1





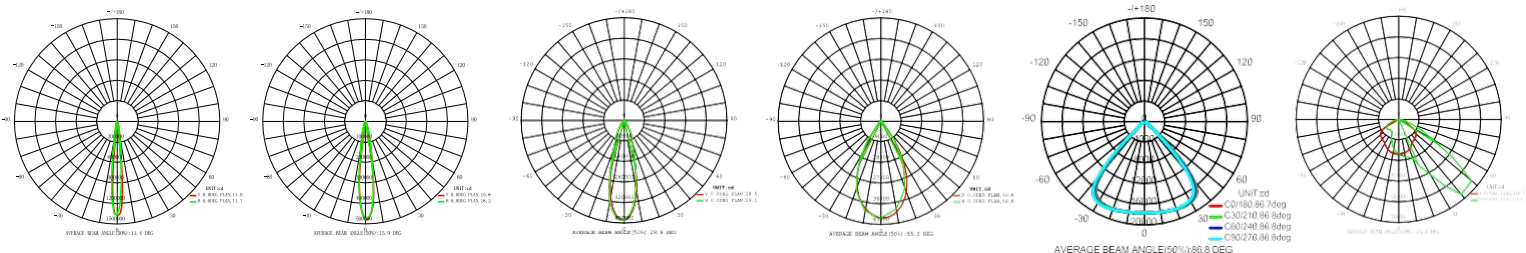




1500W/1800

PHOTOMETRY



LED FLOOD LIGHT FL-07-G8 (A)

INSTALLATION AND USE P1 U-SHAPED BRACKET
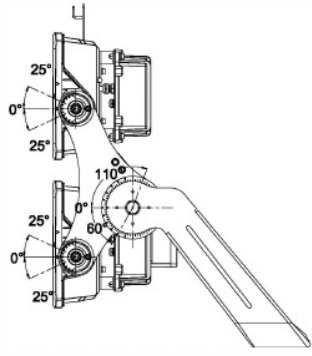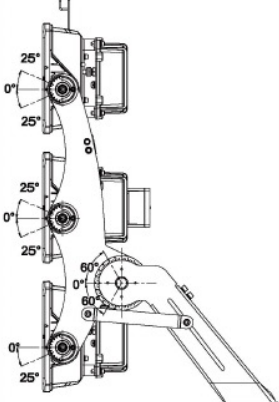
<p>01</p>  <p>M 1.645mm</p>	<p>02</p>  <table border="1"> <thead> <tr> <th>Power</th> <th>D1</th> <th>D2</th> <th>L1</th> <th>L2</th> <th>L4</th> </tr> </thead> <tbody> <tr> <td>600W</td> <td>17mm</td> <td>12.5mm</td> <td>50mm</td> <td>350mm</td> <td>120mm</td> </tr> <tr> <td>1200W</td> <td>17mm</td> <td>17mm</td> <td>50mm</td> <td>350mm</td> <td>120mm</td> </tr> <tr> <td>1800W</td> <td>17mm</td> <td>17mm</td> <td>30mm</td> <td>350mm</td> <td>120mm</td> </tr> </tbody> </table>	Power	D1	D2	L1	L2	L4	600W	17mm	12.5mm	50mm	350mm	120mm	1200W	17mm	17mm	50mm	350mm	120mm	1800W	17mm	17mm	30mm	350mm	120mm	<p>03</p> 	<p>04</p> 	<p>05</p> 
Power	D1	D2	L1	L2	L4																							
600W	17mm	12.5mm	50mm	350mm	120mm																							
1200W	17mm	17mm	50mm	350mm	120mm																							
1800W	17mm	17mm	30mm	350mm	120mm																							
<p>Brown(Black) --- L Blue(White) --- N Green/Yellow --- GND</p> 																												

PACKING SPEC

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement (mm)	Gross weight	Pcs/box
FL400W/500W/600W-07-G8	L685*W490*H265	21.0kg(46.3lbs)	1	/	/	/
FL800W/1000W/1200W-07-G8	L935*W715*H320	47.0kg(104lbs)	1	/	/	/
FL1500W/1800W-07-G8	L1190*W725*H365	65kg(143lbs)	1	/	/	/